


A4RA / B4RA / B46A / BDRA / BMXA / M4RA / S4RA / SLXA

FWD 4 Speed

HONDA

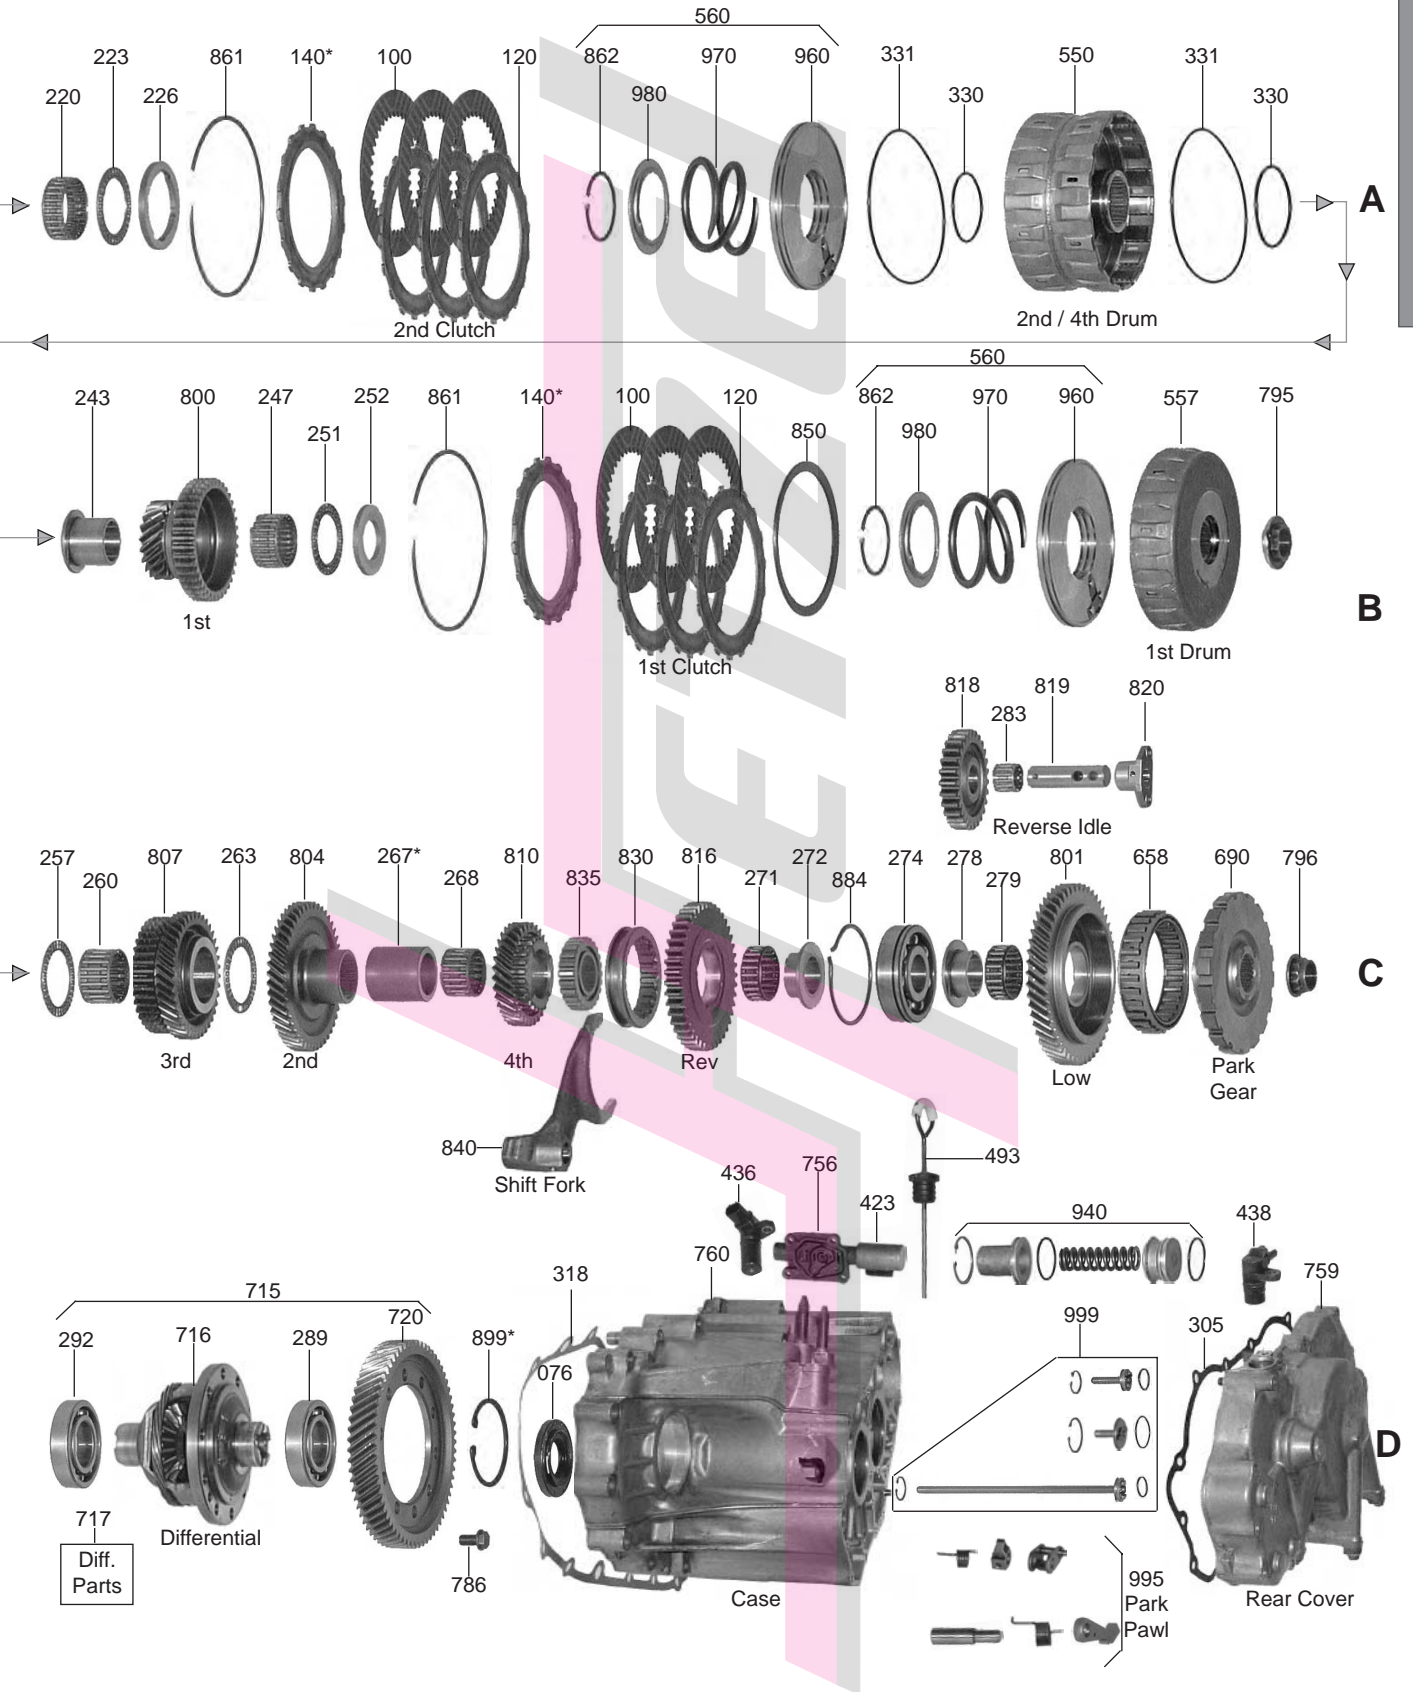


PART #	PAPER & RUBBER KIT	QTY.	REFERENCE #
90000A	Paper & Rubber Kit, S5 / MPSA (Civic AWD) 1989-91	1	
90000D	Paper & Rubber Kit, S24A / A24A / M24A (Civic, Del Sol) 1992-97 (Also Fits A4RA / B4RA / B46A / BDRA / M4RA / S4RA 1996-Up)	1	
90000H	Paper & Rubber Kit, M4TA / MDLA / MDMA / MP7A / SP7A / S4XA (With All Wheel Drive Parts) 1994-01	1	
90000M	Paper & Rubber Kit, BMXA / SLXA / (Civic) 2001-Up	1	

PART #	OVERHAUL KITS	QTY.	REFERENCE #
90002A	Overhaul Kit, S5 / MPSA (Civic AWD) 1989-91	1	
90002D	Overhaul Kit, S24A / A24A / M24A (Civic, Del Sol) 1992-97 (Also Fits A4RA / B4RA / B46A / BDRA / M4RA / S4RA 1996-Up)	1	
90002H	Overhaul Kit, M4TA / MDLA / MDMA / MP7A / SP7A / S4XA / SDMA / SKWA (With All Wheel Drive Parts) 1994-01	1	
90002HA	Overhaul Kit, M4TA/MDLA/MDMA/SDMA 1997-01	1	
90002M	Overhaul Kit, BMXA / SLXA / (Civic) 2001-Up	1	
90002N	Overhaul Kit, BCLA/BZKA/BZNA/GPLA/GPPA/MCLA/MCTA/MCVA/MKYA/MKZA/MRMA/MRVA/MZHA/MZJA/MZKA/MZNA (For Bonded Retainers Sell 2 Pieces Of 90980N)	1	

PART #	MASTER L/STEEL KIT	QTY.	REFERENCE #
90004A	Master L/Steels Kit, S5 / MPSA (Civic AWD) 1989-91	1	
90004C	Master L/Steels Kit, P24 / A2YA / A24A / M24A / S24A (Civic, Del Sol) 1992-97	1	
90004D	Master L/Steels Kit, A4RA / B4RA / B46A / BDRA / S4RA / M4RA (Civic, Del Sol) 1996-Up	1	
90004H	Master L/Steels Kit, M4TA / MDLA / MDMA / MP7A / SP7A / S4XA / SDMA / SKWA (With All Wheel Drive Parts) 1994-01	1	
90004M	Master L/Steels Kit, BMXA / SLXA (Civic) 2001-Up	1	
90004N	Master L/Steels Kit, MCVA/MRVA 2002-04, BZKA/MZKA 2003-05 (For Bonded Retainers Sell 2 Pieces Of 90980N)	1	

PART #	MASTER W/STEEL KIT	QTY.	REFERENCE #
90006A	Master W/Steels Kit, S5 / MPSA (Civic AWD) 1989-91	1	
90006C	Master W/Steels Kit, P24 / A2YA / A24A / M24A / S24A (Civic, Del Sol) 1992-97	1	
90006D	Master W/Steels Kit, A4RA / B4RA / B46A / BDRA / S4RA (Civic, Del Sol) 1996-Up (USA / Canada Built)	1	
90006H	Master W/Steels Kit, M4TA / MDLA / MDMA / MP7A / SP7A / S4XA / SKWA (With All Wheel Drive Parts) 1994-01	1	
90006M	Master W/Steels Kit, BMXA / SLXA (Civic) 2001-Up	1	
90006N	Master W/Steels Kit, MCVA/MRVA 2002-04, BZKA/MZKA 2003-05 (For Bonded Retainers Sell 2 Pieces Of 90980N)	1	

PART #	FILTER	QTY.	REFERENCE #
60010Y	Filter, S5 / MPSA (Flat) (5 1/4" x 2 3/8") 1989-91	1	25420-PL5-000
90010B	Filter, S24A / A24A / M24A / P24 / A2YA (Flat) (6" x 1 15/16")	1	
90010D	Filter, (A4RA/B4RA/MDMA Some) / MDLA (Canister) (6 3/4" Long With Tubes) 1 Hole Bracket Is 1 1/4" From End (Also Fits BMXA)	1	
90010E	Filter, (A4RA/B4RA/MDMA Some) / M4TA (Canister) (6 3/4" Long With Tube) 2 Hol Bracet Is5/8" rm End Also Fts SP7/MP7A/S4XA	1	
90010N	Filter, MCVA / MRVA / BZKA / MZKA (CRV 2002-04) (Element 2003-04)	1	

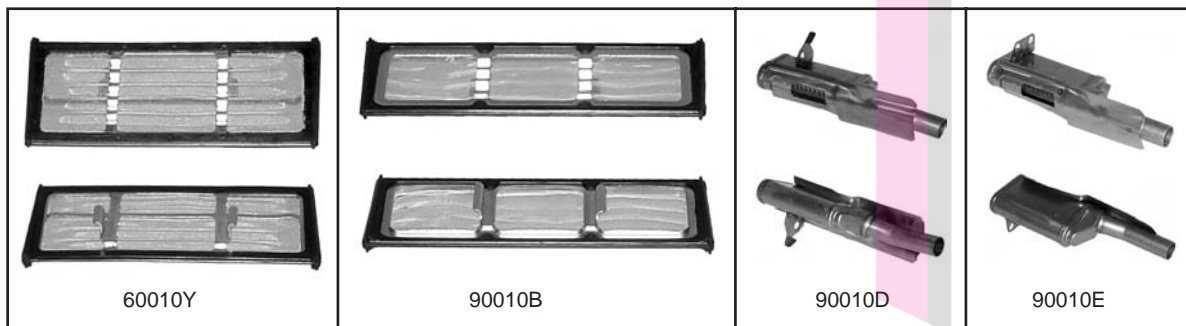

**S24A / A24A / M24A / MDLA / MDMA / M4TA / MP7A / SP7A / S4XA / SKWA /
FWD 4 Speed MRVA / A4RA / B4RA / B46A / BDRA / BMXA / M4RA / S4RA / SLXA**

HONDA

70018C.....	Screen, S24A / A24A / M24A / MDLA / MDMA / M4TA / MP7A / SP7A / S4XA / SKWA / MRVA / A4RA / B4RA / B46A / BDRA / BMXA / M4RA / S4RA / SLXA (Some) (In Valve Body) (.570"OD)(.125" Thick Rubber Boot).....	1	
70018CA.....	Screen, S24A / A24A / M24A / MDLA / MDMA / M4TA / MP7A / SP7A / S4XA / SKWA / MRVA / A4RA / B4RA / B46A / BDRA / BMXA / M4RA / S4RA / SLXA (Some) (In Valve Body) (.662"OD)(.315" Thick Rubber Boot).....	1	

PART #	BUSHINGS	QTY.	REFERENCE #
--------	----------	------	-------------

90030B.....	Bushing Kit, S24A/A24A/M24A/P24/M4TA/SDMA (4 Pieces).....	1	
-------------	---	---	--

PART #	METAL CLAD SEALS	QTY.	REFERENCE #
--------	------------------	------	-------------

60070A.....	Seal, A24A / M24A / S24A / MDLA / M4TA / MP7A / SP7A / S4XA / A4RA / B4RA / BMXA Converter (44 x 68 x 8mm) Counter Clockwise Helix	1	
90070A.....	Seal, S5 / MP5A / P24 / A2YA (Civic, Del Sol) Converter 1989-97.....	1	91207-POX-003
60072.....	Seal, A24A / M24A / S24A / MDLA / M4TA / MP7A / SP7A / S4XA / A4RA / B4RA / BMXA Manual Shaft.....	1	
90076A.....	Seal, S5 / MP5A (Civic All Wheel Drive) Axle (Bell Housing Side) (38 x 54 x 8mm) 1989-91	1	91206-PC8-935
90076C.....	Seal, P24 / A2YA (Civic, Del Sol) Axle (Bell Housing Side) (35 x 56 x 8mm) 1992-97	1	91205-PL3-A01
60076G.....	Seal, S5 / MP5A / S24A / A24A / A4RA / B4RA / M24A (Civic All Wheel Drive) Axle (Case Side) (40 x 76 x 9mm) 1989-00.....	1	91206-PC8-005
60076L.....	Seal, P24 / A2YA / BMXA / MP7A / SP7A / S4XA (Civic, Del Sol) Axle (Case Side) (35 x 76 x 9mm) 1992-97	1	91206-689-005
90077A.....	Seal, S5 / MP5A (Civic All Wheel Drive) Axle (Bell Housing Side) (40 x 76 x 9mm) 1989-91 (Use 60076G).....	1	91206-PC8-005
60077AA.....	Seal, M4TA Axle (Case Side) (35 x 76 x 9mm) 1997-02	1	
90077C.....	Seal, P24 / A2YA (Civic, Del Sol) Axle (Case Side) (35 x 76 x 9mm) 1992-97 (Use 60076L)	1	91206-689-005
60077H.....	Seal, A24A / M24A / S24A / MDLA / M4TA / MP7A / SP7A / S4XA / A4RA / B4RA / BMXA Axle (Bell Housing Side) (40 x 56 x 9mm)	1	

PART #	FRICTION CLUTCH	QTY.	REFERENCE #
--------	-----------------	------	-------------

90100A.....	Friction, S5 / MP5A / S24A / A24A / A4RA / B4RA / M24A / BMXA 1st/2nd/3rd/4th Clutch (.075") 38 Teeth (4.325"OD).....	3-12	22544-P24-A01
170100A.....	Friction, SP7A / MP7A 1st Clutch (.077") 41 Teeth	3	
90100E.....	Friction, M4TA / MDLA / S4XA 1st Clutch (Low) (.075") 38 Teeth (4.560"OD) (W/Straight Grooves From ID To OD) (Also Fits BMXA 3rd/4th Clutch, SP7A / MP7A / S4XA 2nd/4th Clutch)	3-6	
90100EA.....	Friction, M4TA / MDLA 2nd/3rd/4th Clutch (.075") 38 Teeth (4.560"OD) (W/Turtle Shell Type Grooves).....	3-9	
90100N.....	Friction, BZKA/MZKA 1st/2nd And 3rd Clutch (.076")(42Teeth) 2003-Up	AR	
90104H.....	Friction, MP7A / SP7A / S4XA 2nd Clutch 1994-Up.....	3	
90108A.....	Friction, S5 / MP5A / S24A / A24A / M4TA / MDLA / M24A / SP7A / MP7A / S4XA Low/Hold Clutch (.079") 38 Teeth (3.935"OD).....	3	22544-P24-S00
90119C.....	Friction Module, A24A / M24A / S24A 1992-97	1	
90119D.....	Friction Module, A4RA / B4RA / B46A / BDRA / M4RA / BMXA / SLXA 1996-Up	1	
90119ES1.....	Friction Module, M4TA/MDLA/MDMA/S4XA (Stage 1).....	1	
90119M.....	Friction Module, BMXA/SLXA 2001-05	1	

PART #	STEEL CLUTCH	QTY.	REFERENCE #
--------	--------------	------	-------------

60120B.....	Steel, S24A / A24A / M24A 2nd/3rd/4th Clutch (.079") 8 Teeth (3.230"ID) 1989-97.....	3-9	22543-PC9-000
60120BB.....	Steel, S24A / A24A / M24A 1st Clutch (.063") 8 Teeth (3.230"ID) 1989-97	3	22543-PHO-850
170120C.....	Steel, SP7A / MP7A Low Clutch (.079") 10 Teeth (3.440"ID)	3	
90120D.....	Steel, A4RA / B4RA / BMXA 1st Clutch (.063") 18 Teeth (3.220"ID)	3	
90120DA.....	Steel, A4RA / B4RA / BMXA 2nd/3rd/4th Clutch (.079") 18 Teeth (3.220"ID).....	3-9	
90120E.....	Steel, M4TA 1st Clutch (.063") 10 Teeth (3.220"ID)	3	
90120EA.....	Steel, M4TA / MDLA 2nd/3rd/4th Clutch (.079") 10 Teeth (3.220"ID) Also Fits SP7A / MP7A / S4XA 2nd/3rd Clutch.....	3-9	
90120N.....	Steel, MCVA/MRVA/BZKA/MZKA 3rd & 4th Clutch (.091")(20 Teeth)(3.696"ID) 2002-05.....	3-9	
90128A.....	Steel, S5 / MP5A / A24A / M24A / SP7A / S4XA Low/Hold Clutch (.079") 18 Teeth (2.800"ID)	3	22543-PS5-003
90128B.....	Steel, S24A / M4TA / MDLA / MP7A Low/Hold Clutch (.063") 18 Teeth (2.800"ID)	3	

PART #	CLUTCH PRESSURE PLATES	QTY.	REFERENCE #
--------	------------------------	------	-------------

60140B-2.....	Pressure Plate, S24A / A24A / M24A 1st/2nd/3rd/4th Clutch (Stamped # 2) 8 Teeth (3.230"ID) ..	1-4	
60140B-3.....	Pressure Plate, S24A / A24A / M24A 1st/2nd/3rd/4th Clutch (Stamped # 3) 8 Teeth (3.230"ID) ..	1-4	
60140B-4.....	Pressure Plate, S24A / A24A / M24A 1st/2nd/3rd/4th Clutch (Stamped # 4) 8 Teeth (3.230"ID) ..	1-4	
60140B-5.....	Pressure Plate, S24A / A24A / M24A 1st/2nd/3rd/4th Clutch (Stamped # 5) 8 Teeth (3.230"ID) ..	1-4	
60140B-6.....	Pressure Plate, S24A / A24A / M24A 1st/2nd/3rd/4th Clutch (Stamped # 6) 8 Teeth (3.230"ID) ..	1-4	
60140B-7.....	Pressure Plate, S24A / A24A / M24A 1st/2nd/3rd/4th Clutch (Stamped # 7) 8 Teeth (3.230"ID) ..	1-4	

HONDA

PART #	CLUTCH PRESSURE PLATES (Continued)	QTY.	REFERENCE #
60140C-1	Pressure Plate, SP7A/MP7A/S4XA 1st Clutch (Stamped #1) 10 Teeth (3.438"ID)	1	
60140C-2	Pressure Plate, SP7A/MP7A/S4XA 1st Clutch (Stamped #2) 10 Teeth (3.438"ID)	1	
60140C-3	Pressure Plate, SP7A/MP7A/S4XA 1st Clutch (Stamped #3) 10 Teeth (3.438"ID)	1	
60140C-4	Pressure Plate, SP7A/MP7A/S4XA 1st Clutch (Stamped #4) 10 Teeth (3.438"ID)	1	
60140C-5	Pressure Plate, SP7A/MP7A/S4XA 1st Clutch (Stamped #5) 10 Teeth (3.438"ID)	1	
60140C-6	Pressure Plate, SP7A/MP7A/S4XA 1st Clutch (Stamped #6) 10 Teeth (3.438"ID)	1	
60140C-7	Pressure Plate, SP7A/MP7A/S4XA 1st Clutch (Stamped #7) 10 Teeth (3.438"ID)	1	
60140C-8	Pressure Plate, SP7A/MP7A/S4XA 1st Clutch (Stamped #8) 10 Teeth (3.438"ID)	1	
60140C-9	Pressure Plate, SP7A/MP7A/S4XA 1st Clutch (Stamped #9) 10 Teeth (3.438"ID)	1	
60140C-10	Pressure Plate, SP7A/MP7A/S4XA 1st Clutch (Stamped #10) 10 Teeth (3.438"ID)	1	
90140DA	Pressure Plate, A4RA / B4RA / BMXA 1st/2nd/3rd/4th Clutch (Stamped #1) 18 Teeth (3.223"ID)	1-4	
90140DB	Pressure Plate, A4RA / B4RA / BMXA 1st/2nd/3rd/4th Clutch (Stamped #2) 18 Teeth (3.223"ID)	1-4	
90140DC	Pressure Plate, A4RA / B4RA / BMXA 1st/2nd/3rd/4th Clutch (Stamped #3) 18 Teeth (3.223"ID)	1-4	
90140DD	Pressure Plate, A4RA / B4RA 1st/2nd/3rd/4th Clutch (Stamped #4) 18 Teeth (3.223"ID)	1-4	
90140DE	Pressure Plate, A4RA / B4RA 1st/2nd/3rd/4th Clutch (Stamped #5) 18 Teeth (3.223"ID)	1-4	
90140DF	Pressure Plate, A4RA / B4RA 1st/2nd/3rd/4th Clutch (Stamped #6) 18 Teeth (3.223"ID)	1-4	
90140DG	Pressure Plate, A4RA / B4RA 1st/2nd/3rd/4th Clutch (Stamped #7) 18 Teeth (3.223"ID)	1-4	
90140ED	Pressure Plate, M4TA / MDLA 1st/2nd/3rd/4th Clutch (Stamped #4) 10 Teeth (Also Fits SP7A / MP7A / S4XA 2nd/3rd/4th Clutch)	1-4	
90140EE	Pressure Plate, M4TA / MDLA 1st/2nd/3rd/4th Clutch (Stamped #5) 10 Teeth (Also Fits SP7A / MP7A / S4XA 2nd/3rd/4th Clutch)	1-4	
90140EF	Pressure Plate, M4TA / MDLA 1st/2nd/3rd/4th Clutch (Stamped #6) 10 Teeth (Also Fits SP7A / MP7A / S4XA 2nd/3rd/4th Clutch)	1-4	
90140EG	Pressure Plate, M4TA / MDLA 1st/2nd/3rd/4th Clutch (Stamped #7) 10 Teeth (Also Fits SP7A / MP7A / S4XA 2nd/3rd/4th Clutch)	1-4	
90140EH	Pressure Plate, M4TA / MDLA 1st/2nd/3rd/4th Clutch (Stamped #8) 10 Teeth (Also Fits SP7A / MP7A / S4XA 2nd/3rd/4th Clutch)	1-4	
90140EJ	Pressure Plate, M4TA / MDLA 1st/2nd/3rd/4th Clutch (Stamped #9) 10 Teeth (Also Fits SP7A / MP7A / S4XA 2nd/3rd/4th Clutch)	1-4	
90140EK	Pressure Plate, M4TA / MDLA 1st/2nd/3rd/4th Clutch (Stamped #10) 10 Teeth (Also Fits SP7A / MP7A / S4XA 2nd/3rd/4th Clutch)	1-4	
90140EL	Pressure Plate, M4TA / MDLA 1st/2nd/3rd/4th Clutch (Stamped #11) 10 Teeth (Also Fits SP7A / MP7A / S4XA 2nd/3rd/4th Clutch)	1-4	
90140EM	Pressure Plate, M4TA / MDLA 1st/2nd/3rd/4th Clutch (Stamped #12) 10 Teeth (Also Fits SP7A / MP7A / S4XA 2nd/3rd/4th Clutch)	1-4	
90148BA	Pressure Plate, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA Low/Hold Clutch (Stamped #1) 18 Teeth	1	
90148BB	Pressure Plate, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA Low/Hold Clutch (Stamped #2) 18 Teeth	1	
90148BC	Pressure Plate, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA Low/Hold Clutch (Stamped #3) 18 Teeth	1	
90148BD	Pressure Plate, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA Low/Hold Clutch (Stamped #4) 18 Teeth	1	
90148BE	Pressure Plate, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA Low/Hold Clutch (Stamped #5) 18 Teeth	1	
90148BF	Pressure Plate, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA Low/Hold Clutch (Stamped #6) 18 Teeth	1	
90148BG	Pressure Plate, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA Low/Hold Clutch (Stamped #7) 18 Teeth	1	

PART #	WASHERS & BEARINGS	QTY.	REFERENCE #
90206E	Washer, M4TA / SP7A / MP7A / S4XA Under Secondary Shaft Nut (1.120"OD) (Also SP7A / MP7A Mainshaft Nut)	1-2	
90207H	Use 90206E	1	
60209A	Caged Needle Bearing, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Converter Reactor (Front)	1	
60211A	Ball Bearing, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Converter To Bell Housing (2.675"OD / 1.570"ID)	1	
90214B	Caged Needle Bearing, S24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Converter Reactor To Mainshaft (Rear) (.620" Thick)	1	
90214C	Caged Needle Bearing, A24A Converter Reactor To Mainshaft (Rear) (.695" Thick)	1	
60217A	Thrust Bearing, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA 2nd Gear To Mainshaft (Also Fits SP7A / MP7A 3rd Gear To 3rd Clutch Drum (Countershaft) (Also Fits SP7A / MP7A 3rd Gear To 2nd Gear (Countershaft))	1-3	
60220D	Caged Needle Bearing, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA 2nd Gear To Mainshaft	1	
60223A	Thrust Bearing, S24A / A24A / M24A 2nd Gear To Mainshaft	1	

S60223AB Washer, S24A / A24A / M24A 2nd Gear To Mainshaft (Bronze Replacement) (Sonnax) 1
60223E Thrust Bearing, A4RA / M4TA / B4RA / MDLA / BMXA / SP7A / MP7A / S4XA 2nd Gear To Mainshaft 1
60223EB Washer, A4RA / M4TA / B4RA / MDLA / BMXA / SP7A / MP7A / S4XA 2nd Gear To Mainshaft (Bronze Replacement) (Sonnax) 1
60226A01 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.117") 1
60226A02 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.119") 1
60226A03 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.121") 1
60226A04 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.123") 1
60226A05 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.125") 1
60226A06 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.127") 1
60226A07 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.129") 1
60226A08 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.131") 1
60226A09 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.135") 1
60226A10 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.137") 1
60226A11 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.139") 1
60226A12 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.141") 1
60226A13 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.143") 1
60226A14 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.145") 1
60226A15 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.147") 1
60226A16 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.149") 1
60226A17 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.151") 1
60226A18 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.153") 1
60226A19 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.155") 1
60226A20 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.157") 1
60226A21 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.159") 1
60226A22 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.161") 1
60226A23 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.163") 1
60226A24 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.165") 1
60226A25 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.167") 1
60226A26 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.169") 1
60226A27 Race, S24A / A24A / M24A 2nd Gear To Drum (2.010"OD) (.171") 1
60226C1 Race, MDLA / A4RA / M4TA / B4RA / BMXA / SP7A / MP7A / S4XA 2nd Gear To Drum (2.160"OD) (.155") 1
60226C2 Race, MDLA / A4RA / M4TA / B4RA / BMXA / SP7A / MP7A / S4XA 2nd Gear To Drum (2.160"OD) (.157") 1
60226C3 Race, MDLA / A4RA / M4TA / B4RA / BMXA / SP7A / MP7A / S4XA 2nd Gear To Drum (2.160"OD) (.159") 1
60226C4 Race, MDLA / A4RA / M4TA / B4RA / BMXA / SP7A / MP7A / S4XA 2nd Gear To Drum (2.160"OD) (.161") 1
60226C5 Race, MDLA / A4RA / M4TA / B4RA / BMXA / SP7A / MP7A / S4XA 2nd Gear To Drum (2.160"OD) (.163") 1
60226C6 Race, MDLA / A4RA / M4TA / B4RA / BMXA / SP7A / MP7A / S4XA 2nd Gear To Drum (2.160"OD) (.165") 1
60226C7 Race, MDLA / A4RA / M4TA / B4RA / BMXA / SP7A / MP7A / S4XA 2nd Gear To Drum (2.160"OD) (.167") 1
60226C8 Race, MDLA / A4RA / M4TA / B4RA / BMXA / SP7A / MP7A / S4XA 2nd Gear To Drum (2.160"OD) (.169") 1
60226C9 Race, MDLA / A4RA / M4TA / B4RA / BMXA / SP7A / MP7A / S4XA 2nd Gear To Drum (2.160"OD) (.171") 1
90229B Race, S24A / A24A / M4TA / M24A 4th Gear (Mainshaft) To Drum (2.075"OD) 1.032"ID (.176" Thick) With 2 Notches On ID 1
90232B Thrust Bearing, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA 4th Gear To Drum (Mainshaft) (2.115"OD) (1.540"ID) (.098" Thick) 1
60232E Thrust Bearing, S24A / A24A / M24A 3rd Gear To 3rd Clutch Drum (Countershaft) 1
90234B Collar, S24A / A24A / M4TA / M24A 4th Gear To Mainshaft (1.260"OD) 1.024"ID (1.770" Long) (Has No Shoulder) 1
90234D Collar W/Shoulder, A4RA / B4RA / MDLA / BMXA / S4XA 4th Gear To Mainshaft (2.080"OD Of Shoulder) 1.260"OD (1.024"ID) (1.950" Long) 1
90234H Collar W/Shoulder, SP7A / MP7A 4th Gear To Mainshaft (2.080"OD Of Shoulder) (1.260"OD) 1.024"ID (1.930" Long) 1
90236B Caged Needle Bearing, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA 4th Gear To Collar (Mainshaft) (1.460"OD) (.775" Tall) 2
90238B Thrust Bearing, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA 4th Gear (Rear) (Mainshaft) (1.725"OD) (1.265"ID) (.078" Thick) 1
90238D Thrust Bearing, A4RA / B4RA 4th Gear To Snap Ring (Mainshaft) (1.753"OD) (1.265"ID) (.078" Thick)(Also Fits BMXA) 1
90239B Race, S24A / A24A / M4TA / M24A / SP7A / MP7A 4th Gear (Rear) (Mainshaft) (1.765"OD) (1.033"ID) (.137" Thick) 1

HONDA

PART #	WASHERS & BEARINGS (Continued)	QTY.	REFERENCE #
90239D	Race, A4RA / B4RA / MDLA / BMXA / S4XA 4th Gear (Rear) (Mainshaft) (1.760"OD) (1.035"ID) (.177" Thick)	1	
90241B	Roller Bearing, S24A / A24A / M4TA / M24A / MDLA / BMXA / MP7A / SP7A / S4XA Mainshaft To Case (2.952"OD) (Use 60274CA)	1	
90243B	Collar W/Shoulder, S24A / A24A / M24A / SP7A / MP7A 1st Gear To Mainshaft (1.065" Long With Shoulder)	1	
90243D	Collar, A4RA / B4RA / M4RA / MDLA / BMXA / S4XA 1st Gear To Mainshaft (1.065" Long W/Out Shoulder)	1	
90244B	Washer, S24A / A24A / M24A / MDLA / SP7A / MP7A / S4XA 1st Gear To Collar (Mainshaft) (1.645"OD) (1.225"ID) (.057" Thick)	1	
90246B	Collar W/Shoulder, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA 4th Gear To Secondary Shaft	1	
90247B	Caged Needle Bearing, S24A / A24A / A4RA / M4TA / B4RA / M24A / BMXA / SP7A / MP7A / S4XA 1st Gear To 2st Clutch Drum (Mainshaft) (1.350"OD) (.715" Thick)	1	
90248B	Caged Needle Bearing, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA Case To Secondary Shaft	1	
90249B	Thrust Bearing, S24A / A24A / M4TA / M24A / MDLA 4th Gear To Collar (Secondary Shaft)	1	
90250B	Caged Needle Bearing, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA 4th Gear To Collar (Secondary Shaft) (1.240"OD) (.555" Thick)	1	
90251B	Thrust Bearing, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA 1st Gear To 1st Clutch Drum (Mainshaft) (1.842"OD) (1.226"ID) (.078" Thick)	1	
90252B	Race, S24A / A24A / M24A 1st Gear To 1st Clutch Drum (Mainshaft) (1.825"OD) (1.030"ID) (.136" Thick)	1	
90252D	Race, A4RA / M4TA / B4RA / MDLA / BMXA / SP7A / MP7A / S4XA 1st Gear To 1st Clutch Drum (Mainshaft) (1.825"OD) (1.030"ID) (.098" Thick)	1	
90253B	Thrust Bearing, S24A / A24A / M4TA / M24A / MDLA 4th Gear To Low Hold Drum (Secondary Shaft) (1.685"OD) (1.108"OD) (.078" Thick) Also Fits SP7A / MP7A / S4XA	1	
90254A	Caged Roller Bearing, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Bell Housing To Countershaft (2.445"OD) (1.395"ID) (.745" Thick)	1	
90255B	Ball Bearing, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA Case To Secondary Shaft (2.440"OD) (.860"ID) (.590" Thick)	1	
60256C1	Race, S24A/A24A/M24A 3rd Gear (Countershaft) To 3rd Clutch Drum (.118)	1	
60256C2	Race, S24A/A24A/M24A 3rd Gear (Countershaft) To 3rd Clutch Drum (.119)	1	
60256C3	Race, S24A/A24A/M24A 3rd Gear (Countershaft) To 3rd Clutch Drum (.120)	1	
60256C4	Race, S24A/A24A/M24A 3rd Gear (Countershaft) To 3rd Clutch Drum (.121)	1	
60256C5	Race, S24A/A24A/M24A 3rd Gear (Countershaft) To 3rd Clutch Drum (.122)	1	
60256C6	Race, S24A/A24A/M24A 3rd Gear (Countershaft) To 3rd Clutch Drum (.123)	1	
60256C7	Race, S24A/A24A/M24A 3rd Gear (Countershaft) To 3rd Clutch Drum (.124)	1	
60256C8	Race, S24A/A24A/M24A 3rd Gear (Countershaft) To 3rd Clutch Drum (.125)	1	
60256C9	Race, S24A/A24A/M24A 3rd Gear (Countershaft) To 3rd Clutch Drum (.126)	1	
90256D2	Race, A4RA / M4TA / B4RA / MDLA 3rd Gear (Countershaft) To Drum (.176") (26 Inner Splines) (Also Fits BMXA/S4XA)	1	
90256D9	Race, A4RA / M4TA / B4RA / MDLA 3rd Gear (Countershaft) To Drum (.196") (26 Inner Splines) (Also Fits BMXA/S4XA)	1	
90256H	Top Hat Race, SP7A/MP7A 3rd Gear (Countershaft) To 3rd Clutch Drum	1	
90257A	Thrust Bearing, S24A / A24A / M24A 3rd Gear To 3rd Clutch Drum (Countershaft) (Use 60232E)	1	
90257H	Thrust Bearing, SP7A / MP7A 3rd Gear To 3rd Clutch Drum (Countershaft) (Use 60217A)	1	
90257D	Thrust Bearing, AR4A / M4TA / BR4A / BMXA / S4XA 3rd Gear To 3rd Clutch Drum (Countershaft) (Use 90263D)	1	
90258B	Race, S24A / A24A / M4TA / M24A / SP7A / MP7A / S4XA 4th Gear To Low/Hold Drum (Secondary Shaft) (1.665"OD) (.912"ID) (.116" Thick)	1	
90260B	Caged Needle Bearing, S24A / A24A / M24A 3rd Gear To Countershaft (1.460"OD) (.930" Wide)	1	
90260D	Caged Needle Bearing, A4RA / M4TA / B4RA / MDLA / BMXA / SP7A / MP7A / S4XA 3rd Gear To Countershaft (1.580"OD) (.795" Wide)	1	
90260DA	Sleeve Race, A4RA / M4TA / B4RA / BMXA / S4XA 3rd Gear To Countershaft (1.425"OD) (1.220"ID) (.814" Wide) (Use With 90260D)	1	
90263D	Thrust Bearing, A4RA / M4TA / B4RA / MDLA 3rd Gear (Countershaft) To 2nd Gear (2.155"OD) (1.638"ID) (.078" Thick) (Also Fits A4RA / M4TA / B4RA / BMXA / S4XA 3rd Gear To 3rd Clutch Drum (Countershaft)	1-2	
90263H	Thrust Bearing, SP7A / MP7A 3rd Gear To 2nd Gear (Countershaft) (Use 60217A)	1	
60267A1	Collar, S24A / A24A / A4RA / M4TA / B4RA / M24A / BMXA / SP7A / MP7A / S4XA 2nd Gear To 4th Gear (Countershaft) (1.535")	1	
60267A2	Collar, S24A / A24A / A4RA / M4TA / B4RA / M24A / BMXA / SP7A / MP7A / S4XA 2nd Gear To 4th Gear (Countershaft) (1.537")	1	
60267A3	Collar, S24A / A24A / A4RA / M4TA / B4RA / M24A / BMXA / SP7A / MP7A / S4XA 2nd Gear To 4th Gear (Countershaft) (1.539")	1	

**S24A / A24A / M24A / MDLA / MDMA / M4TA / MP7A / SP7A / S4XA / SKWA /
FWD 4 Speed MRVA / A4RA / B4RA / B46A / BDRA / BMXA / M4RA / S4RA / SLXA**

HONDA

90268B	Caged Needle Bearing, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA 4th Gear To Countershaft (1.270"OD) (.812" Thick)	1
90271B	Caged Needle Bearing, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Reverse Gear (Countershaft) (1.460"OD) (.540" Wide) (Use 90279B)	1
90272B	Collar, S24A / A24A / M4TA / M24A / SP7A / MP7A Reverse Gear (Countershaft) 2 Notch (1.845"OD Shoulder) (1.259"OD) (1.023"ID) (.572" Thick) (Use 90278B)	1
90272D	Collar, A4RA / B4RA / BMXA / S4XA Reverse Gear (Countershaft) 4 Notch (1.840"OD Of Shoulder) (1.259"OD) (1.023"OD) (.572" Thick) (Use 90278D)	1
60274C	Ball Bearing, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / MP7A / SP7A / S4XA Case To Countershaft (2.670"OD)	1
60274CA	Roller Bearing, S24A / A24A / M4TA / M24A / MDLA / BMXA / MP7A / SP7A / S4XA Mainshaft To Case (2.952"OD)	1
90278B	Collar, S24A / A24A / M4TA / M24A / SP7A / MP7A Low Gear (Countershaft) 2 Notch (1.845"OD Shoulder) (1.259"OD) (1.023"ID) (.572" Thick) (Also Fits Reverse Gear (Countershaft)	1-2
90278D	Collar, A4RA / B4RA / BMXA / S4XA Low Gear (Countershaft) 4 Notch (1.840"OD Of Shoulder) (1.259"OD) (1.023"OD) (.572" Thick) (Also Fits Reverse Gear (Countershaft)	1-2
90279B	Caged Needle Bearing, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Low Gear To Collar (Countershaft) (1.460"OD) (.540" Wide) (Also Fits 4th Gear To Countershaft)	1-2
80283	Caged Needle Bearing, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / MP7A / SP7A / S4XA Reverse Idler (14 Needles)	1
90295E	Washer, M4TA / BMXA / S4XA Under Mainshaft Nut (1.204"OD)	1
90297E	Washer, M4TA / BMXA / SP7A / MP7A / S4XA Under Countershaft Nut (1.400"OD)	1

PART #	GASKETS & RUBBER COMPONENTS	QTY.	REFERENCE #
---------------	--	-------------	--------------------

90305M	Gasket, BMXA/SLXA Rear Cover (Side Cover) 2001-Up	1
60313A	O-Ring, Honda Converter (OE Upgraded)(Fits On ConverterHub, Inside Of Drive Pump Gear)	1
90318M	Gasket, BMXA/SLXA Bell Housing To Case 2001-Up	1
90379E	Seal, A4RA / B4RA / MDMA / M4TA / MP7A / SP7A / S4XA Filter	1

PART #	TECHNICAL MANUALS	QTY.	REFERENCE #
---------------	--------------------------	-------------	--------------------

90400A	Technical Manual, M24A / A24A / S24A 1992-93	1
--------	--	---

PART #	ELECTRICAL COMPONENTS	QTY.	REFERENCE #
---------------	------------------------------	-------------	--------------------

80410D	Switch, MDLA/ M4TA Neutral Safety (On Rear Cover)	1	
90410L	Switch, MDMA Neutral Safety (2 Bolt)(9 Pin Connector With Wire Harness)	1	
90410M	Switch, BMXA Neutral Safety (2 Bolt, 10 Pin Connector)	1	
90421M	Solenoid, BMXA Shift (On The Outside Rear Of Case) (Dual With Wire Harness With 2 Prong Connector) 2001-05	1	
30422B	Solenoid, BMXA On Bell Housing (Black Solenoid)	1	
90423D	Solenoid, A4RA/B4RA/M4TA/MDLA/MDMA Linear (Single With 4 Bolt Mounting Block) 1996-01	1	
90423M	Solenoid, BMXA/SLXA Linear (Dual With Mounting Block) 2001-05	1	
90423N	Solenoid, MCVA/MRVA Linear (Single W/4 Bolt Mounting Block) 2002-04	1	
90425B	Solenoid Assembly, A24A / S24A / A4RA / M4TA / B4RA / M24A / B46A / MDLA / MP7A / SP7A / A2YA / M4RA / M4VA / MDMA Lock-Up (Has 2 1/2" Wire Harness) (Is On Outside Top Of Bell) (3 Bolt) (Dual Solenoid)	1	28300-P24-J01
90425D	Solenoid Assembly, A4RA / B4RA / M4RA / M4TA / B46A / M4VA / MDLA / MDMA Shift (Has 5 1/2" Wire Harness) (On Outside Of Case) (3 Bolt) (Dual Solenoid)	1	28200-P4R-003
90425H	Solenoid Assembly, MP7A / SP7A / S4XA Shift 1994-97 (Has 18" Wire Harness) (On Outside Of Case) (3 Bolt) (Dual Solenoid)	1	28200-P56-003
90425M	Solenoid, BMXA On Bell Housing (Single) (Use 30422B)	1	
90436D	Sensor, A4RA/B4RA/M4YA/MDLA/BMXA Output (1 Bolt, 2 Wire Connector) On Top Of Case	1	
90436H	Sensor, SP7A/MP7A/S4XA Output (1 Bolt, 2 Wire, 8" Long Harness, 3/4" Wide Connector)	1	
90436HA	Sensor, SP7A/MP7A/S4XA Output (1 Bolt, 2 Wire, 8" Long Harness, 1" Wide Connector)	1	
90438D	Sensor, A4RA / M4TA / B4RA / MDLA / BMXA / SP7A / MP7A / S4XA Input Speed (2 Prong Connector) (Plastic) (3 3/4" Long) (1 Bolt)	1	

PART #	MISC. COMPONENTS	QTY.	REFERENCE #
---------------	-------------------------	-------------	--------------------

90490B	Vent, S24A / A24A / M24A (3 Bolt) Aluminum (On Rear Cover)	1
30492A	Drain Plug, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA	1
90493B	Dipstick, S24A / A24A / A4RA / M4TA / B4RA / M24A / BMXA / SP7A / MP7A / S4XA	1
90495B	Intake Pipe, S24A / A24A / M24A Filter (8" Long) With Shield & 1 Hole Bracket)	1
90507B-3	Pin, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA (Inner Pump Gear) (1.685" Long) (.550"OD)	1

PART #	HARD PARTS	QTY.	REFERENCE #
90529B	Converter Reactor, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA (Stator) (With Cast # P24, P4R, P4P) (These All Interchange)	1	
60530C	Pump Gears, S24A / A24A / M24A / A4RA / M4TA / B4RA / MDLA / SP7A / MP7A / S4XA (38 Spline Gear) 28 Teeth (.470" Thick)	1	
90550D	Drum, A4RA / B4RA / BMXA 2-4 Clutch (18 Teeth Steels) Stamped Steel (2.370" Overall Thickness) (.125" Thick Hub) (.100" Thick Ears)	1	
60550E	Drum, M4TA / SP7A / MP7A / S4XA 2-4 Clutch (Less Pistons) (With Thick Hub)	1	
60550G	Drum, S24A / A24A / M24A 2-4 Clutch (Less Pistons)	1	
90554B	Drum, S24A / M4TA / MDLA / SP7A / S4XA Low/Hold Clutch (Secondary Shaft) (1.175" Tall)	1	
90554C	Drum, A24A / M24A / MP7A Low/Hold Clutch (Secondary Shaft) (1.192" Tall)	1	
60554C	Drum, SP7A/MP7A 1st Clutch	1	
90555B	Drum, S24A / A24A / M24A 3rd Clutch (8 Teeth Steels) (1.262" Tall) (1.426"ID Bore) (1.580"OD Hub)	1	
90555D	Drum, A4RA / B4RA / BMXA 3rd Clutch (18 Teeth Steels) (1.240" Tall) (1.425"ID Bore) (1.660"OD Hub)	1	
90555E	Drum, M4TA / MDLA / SP7A / MP7A / S4XA 3rd Clutch (10 Teeth Steels) (1.275" Tall) (1.430"ID Bore Stepped To 1.398"ID) (1.580"OD Hub)	1	

PART #	SPRAGS & ONE WAY CLUTCHES	QTY.	REFERENCE #
90557B	Drum, S24A / A24A / M24A 1st Clutch (8 Teeth Steels) (Sealing Ring Is On The Clutch Side Of Drum)	1	
90557D	Drum, A4RA / B4RA / BMXA 1st Clutch (18 Teeth Steels) (Sealing Ring Is On The Clutch Side Of Drum)	1	
90557E	Drum, M4TA / MDLA 1st Clutch (10 Teeth Steels) Sealing Ring Is On The Clutch Side Of Drum	1	
90557H	Drum, SP7A / MP7A 1st Clutch (10 Teeth Steels) Sealing Ring Is On The Clutch Side Of Drum	1	
90564B	Piston Kit, S24A / A24A / M4TA Low/Hold Clutch (Secondary Shaft)	1	
90658B	Sprag, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Low (28 Lugs)	1	

PART #	HARD PARTS (Continued)	QTY.	REFERENCE #
90672B	Mainshaft, S24A / A24A / M24A (40 Teeth / No Groove) 15 1/2" Long	1	
90672D	Mainshaft, A4RA (41 Teeth / 1 Wide Groove)	1	
90672E	Mainshaft, M4TA (38 Teeth / 1 Wide & 1 Narrow Groove) 15 1/2" Long	1	
90672F	Mainshaft, B4RA / S4XA (40 Teeth / 2 Grooves)	1	
90672H	Mainshaft, SP7A / MP7A (40 Teeth / 3 Grooves) 15 5/8" Long	1	
90672M	Mainshaft, BMXA (40 Teeth / 3 Grooves, 1 Wide & 2 Narrow) 15 5/8" Long	1	
90675B	Secondary Shaft, S24A / A24A / M4TA / M24A / MDLA (5 3/5" Long) (Also Fits BMXA/SP7A/MP7A/S4XA)	1	
90676B	Countershaft, S24A / A24A / M24A (15 Teeth / 1 Groove) 11" Long	1	
90676D	Countershaft, A4RA / B4RA / SX4A (14 Teeth / 3 Groove) 11 1/4" Long	1	
90676E	Countershaft, M4TA / MDLA (14 Teeth / 4 Groove) 11 1/4" Long (1 Wide Groove & 3 Narrow Grooves)	1	
90676H	Countershaft, SP7A / MP7A (14 Teeth / No Groove) 11 1/4" Long	1	
90676M	Countershaft, BMXA (15 Teeth / No Groove) 11 1/4" Long	1	
90680B	Governor Assembly, S24A / A24A / M24A / (Cast # P24) (17 Teeth)	1	
60689A	Plate, S24A / A24A / A4RA / M4TA / B4RA / M24A Oil (Countershaft)	1	
90689B	Cup, S24A / A24A / M4TA / M24A / SP7A / MP7A / S4XA Oil (On End Of Secondary Shaft)	1	
90689J	Cup, MDLA Oil (On End Of Secondary Shaft) (With Short Tube)	1	
90690B	Gear, S24A / A24A / M24A Park (18 Lugs / 5 Top Notches) (Countershaft) (4.405"OD) (2.626"OD Sprag Race) (.390" Thick Lugs)	1	
90690D	Gear, A4RA / M4TA / B4RA / BMXA / SP7A / MP7A / S4XA Park (18 Lugs / No Top Notches) (Countershaft) (4.405"OD) (2.626"OD Sprag Race) (.390" Thick Lugs)	1	
90694B	Retainer, S24A / A24A / M4TA / M24A (Some M4TA) Holds Bearing # 248 To Shaft (1 5/8" Long)	1	
90694J	Retainer, M4TA / MDLA / SP7A / MP7A / S4XA (Some M4TA) Holds Bearing #248 To Shaft (1 1/4" Long)	1	
90698E	Oil Baffle, M4TA / SP7A / MP7A / S4XA Differential (Tin)	1	
90715B	Differential Assembly, S24A / A24A / M24A (65 Teeth / 2 Groove)	1	
90715D	Differential Assembly, A4RA / B4RA (61 Teeth / 3 Groove) (23 Teeth Speed-O) 2 Narrow Grooves & 1 Wide Groove (1.010"ID Axle Hole)	1	
90715E	Differential Assembly, M4TA (61 Teeth / 4 Groove) (26 Teeth Speed-O) (53 Teeth Middle Gear) All Wheel Drive (3 Narrow Grooves & 1 Wide Groove)	1	
90715H	Differential Assembly, SP7A / MP7A (61 Teeth / 3 Groove) (23 Teeth Speed-O)	1	
90715HA	Differential Assembly, S4XA (61 Teeth / 3 Groove) (23 Teeth Speed-O) 2 Narrow Grooves & 1 Wide Groove (1.100"ID Axle Hole)	1	

**S24A / A24A / M24A / MDLA / MDMA / M4TA / MP7A / SP7A / S4XA / SKWA /
FWD 4 Speed MRVA / A4RA / B4RA / B46A / BDRA / BMXA / M4RA / S4RA / SLXA**

HONDA

90715J.....	Differential Assembly, MDLA (61 Teeth / 4 Grooves) (26 Teeth Speed-O) 2 Wheel Drive(3 Narrow Grooves & 1 Wide Groove)	1	
90715M.....	Differential Assembly, BMXA (61 Teeth / 2 Wide Grooves) (23 Teeth Speed-O)	1	
90740B.....	Valve Body, S24A/ M24A (Cast # P24) Less Pump Gears.....	1	
90740C.....	Valve Body, A24A (Cast # P24Y) Less Pump Gears.....	1	
90740D.....	Valve Body, A4RA / M4TA / B4RA (Cast # P4R1 or P4R2) Less Pump Gears	1	
90740H.....	Valve Body, SP7A / MP7A / S4XA (Cast # HM-1, P56, Or E-2) Less Pump Gears.....	1	
90740J.....	Valve Body, MDLA (Cast # PDMX) Less Pump Gears.....	1	
90740M.....	Valve Body, BMXA (Cast # PLX2) Less Pump Gears	1	
90740MA.....	Valve Body, BMXA (Cast # PLX1 or PLX3) (Less Pump Gears).....	1	

PART #	VALVE BODY COMPONENTS	QTY.	REFERENCE #
--------	-----------------------	------	-------------

80741-1.....	Valve & Spring, S24A / A24A / A4RA / M4TA / B4RA / M24A / SP7A / MP7A / S4XA / BMXA(Converter Check Valve) (In Valve Body).....	1	
90741B-5.....	Check Ball, S24A / A24A / A4RA / M4TA / B4RA / M24A Valve Body (.210"OD) Steel	AR	
90741D-3.....	Spring, A4RA / B4RA / M4RA CPC Valve 1996-99	1	
90747B.....	Seperator Plate, S24A / A24A / M24A Valve Body	1	
90747D.....	Seperator Plate, A4RA / B4RA Valve Body	1	
90747E.....	Seperator Plate, M4TA Valve Body	1	
90747H.....	Seperator Plate, SP7A / MP7A / S4XA (Valve Body)	1	
90747J.....	Seperator Plate, MDLA Valve Body	1	
90747L.....	Seperator Plate, MDMA Valve Body.....	1	
90747M.....	Seperator Plate, BMXA Valve Body	1	
90749B.....	Cam, S24A / A24A / M24A / SP7A / MP7A / S4XA (TV Link) Pie Shaped.....	1	

PART #	HARD PARTS (Continued)	QTY.	REFERENCE #
--------	------------------------	------	-------------

90750B.....	Bell Housing, S24A / A24A / M24A (Cast # P24JO) 5 3/8" Top Bolts (A24A Has No Cast #But Is The Same As This One).....	1	
90750D.....	Bell Housing, A4RA / B54RA (Cast # P4R) 5 3/8" Top Bolts	1	
90750E.....	Bell Housing, M4TA (Cast # PDM) 5 1/2" Top Bolts (All Wheel Drive)	1	
90750H.....	Bell Housing, SP7A / MP7A / S4XA (Cast # P56) 5 1/2" Top Bolts	1	
90750J.....	Bell Housing, MDLA (Cast # PDL) 5 1/2" Top Bolts	1	
90750M.....	Bell Housing, BMXA (Cast # PLX) 5 1/2" Top Bolts	1	
90759B.....	Rear Cover, S24A / A24A / M24A (Cast # P24).....	1	
90759D.....	Rear Cover, A4RA / B4RA (Cast # P4R) No Linkage Seal.....	1	
90759E.....	Rear Cover, M4TA / MDLA (Cast # P4R, PDM) With Linkage Seal	1	
90759H.....	Rear Cover, SP7A / MP7A (Cast # P56)	1	
90759HA.....	Rear Cover, S4XA (Cast # P4X, P4T, Or P6M).....	1	
90759M.....	Rear Cover, BMXA (Cast # PLX)	1	
90760B.....	Case, S24A / A24A / M24A (18 Bolt) No Solenoid	1	
90760D.....	Case, A4RA / B4RA (18 Bolt) 3 Bolt Dual Solenoid (4 Bolt Single Solenoid) Top Vent.....	1	
90760E.....	Case, M4TA (19 Bolt) 3 Bolt Dual Solenoid (4 Bolt Single Solenoid) Top Vent (All Wheel Drive) ...	1	
90760H.....	Case, SP7A / MP7A / S4XA (18 Bolt) 3 Bolt Dual Solenoid (Top Vent).....	1	
90760J.....	Case, MDLA (18 Bolt) 3 Bolt Dual Solenoid (4 Bolt Single Solenoid) Top Vent	1	
90760M.....	Case, BMXA (18 Bolt) (3 Bolt Dual Solenoid & 6 Bolt Dual Solenoid) Top Vent	1	
90774B.....	Speed-O Housing, S24A / A24A / M24A / MDLA / SP7A / MP7A / S4XA (Aluminum) 20 Teeth(With 3 Pin Connector) (Has A 2 Bolt Sensor Mounted On Top).....	1	
90774D.....	Speed-O Housing, A4RA / M4TA / B4RA / BMXA (Plastic) 20 Teeth (With 3 Pin Connector)(Sensor Is Made Into The Speed-O Housing).....	1	
90774M.....	Speed-O Housing, BMXA (Plastic) 19 Teeth (With 3 Pin Connector) Sensor Is Made Into TheSpeed-O Housing.....	1	
90776BK.....	Bolt Set, S24A / A24A / M24A Case To Bell (18 Pieces)	1	
90776HK.....	Bolt Set, SP7A / MP7A / S4XA / BMXA Case To Bell (18 Pieces).....	1	
90776DK.....	Bolt Set, A4RA / B4RA / MDLA Case To Bell (18 Pieces)	1	
90776EK.....	Bolt Set, M4TA Case To Bell (19 Pieces)	1	
90776HK.....	Bolt Set, SP7A / MP7A / S4XA Case To Bell (18 Pieces).....	1	
90782BK.....	Bolt Set, S24A / A24A / M24A / SP7A / MP7A / S4XA Valve Body To Bell (4 Pieces).....	1	
90782DK.....	Bolt Set, A4RA / M4TA / B4RA / MDLA / BMXA Valve Body To Bell (5 Pieces)	1	
90784BK.....	Bolt Set, S24A / A24A / M24A Holds Servo Assembly To Valve Body.....	1	
90784DK.....	Bolt Set, A4RA / M4TA Holds Servo To Valve Body	1	
90784FK.....	Bolt Set, B4RA / BMXA Holds Servo To Valve Body	1	
90784HK.....	Bolt Set, SP7A / MP7A / S4XA Holds Servo To Valve Body (11 Pieces).....	1	
90786BK.....	Bolt Set, S24A / A24A / M24A / SP7A / MP7A / S4XA Regulator To Valve Body (8 Pieces)	1	
90786DK.....	Bolt Set, A4RA / M4TA / B4RA / BMXA Regulator To Valve Body (8 Pieces).....	1	
90790A.....	Bolt, A24A / M24A / S24A / M4TA / MDLA / SP7A / MP7A / S4XA Holds Secondary ShaftBearing Retainer To Case (1 1/4" Long)	1	
80795.....	Nut, M4TA / MDLA (Countershaft) (Left Hand Threads) (.435" Thick)	1	
60795A.....	Nut, A24A / M24A / S24A (Mainshaft) (Left Hand Threads)	1	

PART #	HARD PARTS (Continued)	QTY.	REFERENCE #
90795D	Nut, A4RA / B4RA / M4TA / MDLA / BMXA / S4XA (Mainshaft) (Left Hand Threads)	1	
90796B	Nut, S24A / A24A / M24A / M24A / MDLA / SP7A / MP7A / SX4A (Secondary Shaft) (Right Hand Threads)	1	
90796D	Nut, B4RA / A4RA / MP7A / SP7A / S4XA / BMXA (Countershaft) (Left Hand Threads)	1	
60796E	Nut, S24A / A24A / M24A (Countershaft) (.845"ID) (Right Hand Threads)	1	
90796H	Nut, SP7A / MP7A / BMXA / S4XA (Countershaft) Left Hand Thread	1	
90800B	Gear, S24A / A24A / M24A 1st (Mainshaft) 20 Teeth (1 Groove) 38 Teeth Hub (1.710" Overall Height)	1	
90800D	Gear, A4RA / B4RA 1st (Mainshaft) 20 Teeth (No Groove) 38 Teeth Hub (1.890" Overall Height)	1	
90800E	Gear, M4TA / MDLA / BMXA / S4XA 1st (Mainshaft) 18 Teeth (1 Groove) 38 Teeth Hub (1.875" Overall Height)	1	
90800H	Gear, SP7A / MP7A 1st (Mainshaft) 18 Teeth (1 Groove) 41 Teeth Hub (1.755" Overall Height)	1	
90801B	Gear, S24A / A24A / M24A / SP7A / MP7A Low (Countershaft) 52 Teeth (1 Groove) 4.950"OD (1.495"ID) .860" Thick	1	
90801D	Gear, A4RA Low (Countershaft) 52 Teeth (No Groove) 4.950"OD (1.495"ID) .860" Thick	1	
90801E	Gear, M4TA / B4RA / MDLA / BMXA / S4XA Low (Countershaft) 49 Teeth (1 Groove) 4.795"OD (1.495"ID) .860"OD Thick	1	
90802B	Gear, S24A / A24A / M24A Low (Secondary Shaft) 52 Teeth (No Groove) Left Angle (With 2 Holes)	1	
90802E	Gear, M4TA / MDLA / S4XA Low (Secondary Shaft) 49 Teeth (1 Groove) Right Angle (Also Fits SPXA) (Has 6 Holes And Will Retro Fit With The 2 Hole)	1	
90802H	Gear, SP7A / MP7A Low (Secondary Shaft) 49 Teeth (1 Groove) Right Angle (With 2 Holes)	1	
90803B	Gear, S24A / A24A / M24A 2nd (Mainshaft) 32 Teeth (No Groove) 2.895"OD (1.615"ID) 1.325" Tall	1	
90803D	Gear, A4RA 2nd (Mainshaft) 32 Teeth (2 Groove) 2.895"OD (1.615"ID) 1.325" Tall	1	
90803E	Gear, M4TA / MDLA / S4XA 2nd (Mainshaft) 31 Teeth (2 Wide Grooves) 2.870"OD (1.615"ID)	1	
90803F	Gear, B4RA 2nd (Mainshaft) 31 Teeth (2 Narrow Grooves) 2.895"OD (1.615"ID) 1.325" Tall	1	
90803H	Gear, SP7A / MP7A 2nd (Mainshaft) 32 Teeth (1 Groove) 2.895"OD (1.615"ID) 1.275" Tall	1	
90803M	Gear, BMXA 2nd (Mainshaft) 32 Teeth (2 Grooves) 2.895"OD (1.615"ID) 1.325" Tall	1	
90804B	Gear, S24A / A24A / M24A 2nd (Countershaft) 47 Teeth (No Groove) ID Splines Are Away From Gear End Of Nose (.240" Deep Bearing Pocket)	1	
90804D	Gear, A4RA / M4TA / B4RA / MDLA / BMXA / S4XA 2nd (Countershaft) 47 Teeth (2 Groove)	1	
90804H	Gear, SP7A / MP7A 2nd (Countershaft) 47 Teeth (No Groove)	1	
90807B	Gear, S24A / A24A / M24A 3rd (Countershaft) 39 Teeth (No Groove)	1	
90807D	Gear, A4RA / SP7A / MP7A 3rd (Countershaft) 39 Teeth (1 Wide Groove)	1	
90807E	Gear, M4TA / MDLA 3rd (Countershaft) 41 Teeth (No Groove)	1	
90807F	Gear, B4RA / BMXA / S4XA 3rd (Countershaft) 39 Teeth (2 Groove)	1	
90809B	Gear, S24A / A24A 4th (Mainshaft) 46 Teeth Big Gear (2 Grooves) 22 Teeth Small Gear (38 Teeth Hub)	1	
90809D	Gear, A4RA / B4RA 4th Gear (Mainshaft) 47 Teeth Big Gear (1 Groove) 22 Teeth Small Gear (38 Teeth Hub)	1	
90809E	Gear, M4TA / MDLA / BMXA 4th (Mainshaft) 45 Teeth Big Gear (2 Groove) 22 Teeth Small Gear (38 Teeth Hub)	1	
90809G	Gear, M24A / SP7A / MP7A 4th (Mainshaft) 47 Teeth Big Gear (No Groove) 22 Teeth Small Gear (38 Teeth Hub)	1	
90809M	Gear, BMXA / S4XA 4th (Mainshaft) 46 Teeth Big Gear, 1 Groove (22 Teeth Small Gear) (38 Teeth Hub)	1	
90810B	Gear, A24A / S24A (Some) 4th (Countershaft) 31 Teeth (2 Groove)	1	
90810D	Gear, A4RA / B4RA / S4XA 4th (Countershaft) 30 Teeth (1 Groove)	1	
90810E	Gear, M4TA / MDLA 4th (Countershaft) 32 Teeth (2 Groove)	1	
90810G	Gear, M24A / S24A (Some) / SP7A / MP7A 4th (Countershaft) 30 Teeth (No Groove)	1	
90810M	Gear, BMXA 4th (Countershaft) 31 Teeth (1 Wide Groove)	1	
90811B	Gear, S24A / A24A 4th (Secondary Shaft) 31 Teeth (No Groove)	1	
90811E	Gear, M4TA / MDLA 4th (Secondary Shaft) 32 Teeth (2 Groove)	1	
90811G	Gear, M24A / SP7A / MP7A 4th (Secondary Shaft) 30 Teeth (3 Groove)	1	
90811HA	Gear, S4XA 4th (Secondary Shaft) 30 Teeth (1 Groove)	1	
90816B	Gear, S24A / A24A / M4TA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Reverse (Countershaft) 43 Teeth (No Groove) .470" Thick (Has 4 Wide Notches On Top)	1	
90816D	Gear, A4RA / B4RA Reverse (Countershaft) 43 Teeth (No Groove) .485" Thick (Has 4 Small Notches On Top)	1	
60818A	Gear, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Reverse Idler (27 Teeth)	1	
90819B	Pin, S24A / A24A / A4RA / M4TA / B4RA Reverse Idler	1	
90820B	Bracket, S24A / A24A / A4RA / M4TA / B4RA / M24A / BMXA / SP7A / MP7A / S4XA Reverse Idler	1	

**S24A / A24A / M24A / MDLA / MDMA / M4TA / MP7A / SP7A / S4XA / SKWA /
FWD 4 Speed MRVA / A4RA / B4RA / B46A / BDRA / BMXA / M4RA / S4RA / SLXA**

60830CA.....	Selector, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Reverse Countershaft (2.275"OD Where Fork Rides) Left Angled Teeth On Reverse Side, Pointed Teeth On 4th Gear Side	1
60835C.....	Hub, S24A / A24A / A4RA / M4TA / B4RA / M24A / BMXA / SP7A / MP7A / S4XA Reverse Countershaft.....	1
90840B.....	Shift Fork, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA (Cast # P24)	1
90850B.....	Cushion, S24A / A24A / A4RA / B4RA / M24A 1st/2nd/3rd/4th Clutch (3.980"OD) .078" Thick.....	1-4
90850BA.....	Cushion, S24A / A24A / A4RA / B4RA / M24A 1st/2nd/3rd/4th Clutch (3.980"OD) .070" Thick (3.430"ID)	1-4
90850BB.....	Cushion, S24A / A24A / A4RA / B4RA / M24A 1st/2nd/3rd/4th Clutch (3.980"OD) .060" Thick.....	1-4
60850C.....	Cushion, M4TA / MDLA / MDMA / MP7A / SKWA / SP7A / S4XA 1st/2nd/3rd/4th (4.200"OD) (.078" Thick) Waved Replaces Beveled Cushion	1-4
90850EA.....	Cushion, M4TA / MDLA 3rd Clutch (4.200"OD) .060" Thick	1
90850EB.....	Cushion, M4TA 2nd Clutch (4.200"OD) .045" Thick	1
90850H.....	Cushion, SP7A / MP7A / S4XA 1st/2nd/3rd/4th Clutch (4.200"OD) (.072" Thick)	1-4
90850M.....	Cushion, BMXA 1st/3rd/4th Clutch (3.985"OD) .071" Thick (Split Not Solid) Wavy Not Dished ...	1-3
90853B.....	Cushion, S24A / A24A / M24A / SP7A / MP7A / S4XA Low/Hold Clutch (Secondary Shaft) 3.615"OD (.064" Thick).....	1
90853E.....	Cushion, M4TA / MDLA Low/Hold Clutch (Secondary Shaft) 3.615"OD (.075" Thick)	1
60861B.....	Snap Ring, S24A / A24A / A4RA / B4RA / M24A / BMXA Holds 1st/2nd/3rd/4th Clutch Pressure Plate In Drums	1-4
90861E.....	Snap Ring, M4TA / MDLA / SP7A / MP7A / S4XA Holds 1st/2nd/3rd/4th Clutch Pressure Plate In Drums 4.920"OD	1-4
90862B.....	Snap Ring, S24A / A24A / M4TA / M24A / MDLA / MPYA / M5DA Holds 1st/3rd/4th Clutch Retainer In (1.780"OD) .145" Thick ID To OD (Also Fits SP7A / MP7A / S4XA 1st Clutch & 4th Clutch)	1-4
90862BA.....	Snap Ring, A4RA / B4RA Holds 1st/2nd/3rd/4th Clutch Retainer In (1.810"OD) .120" Thick ID To OD (Also Fits S24A / A24A / M24A 2nd Clutch Drum) (Also Fits BMXA 1st/3rd/4th Clutch) ...	1-4
90862E.....	Snap Ring, M4TA / MDLA / MPWA Holds 2nd Clutch Retainer In (1.810"OD) .097" Thick ID To OD (Also Fits SP7A / MP7A / S4XA 2nd/3rd Clutch Retainer In)	1-2
90867B.....	Snap Ring, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA Holds Low/Hold Pressure Plate In Drum (Secondary Shaft) 4.275"OD (.060" Thick)	1
60870A.....	Snap Ring, S24A / A24A / A4RA / M4TA / B4RA / M24A Holds Bearing (#209) In Stator (Front) ...	1
90877B.....	Snap Ring, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA Holds Retainer In Low/Hold Drum (Secondary Shaft) 1.500"OD (.059" Thick)	1
60879C.....	Snap Ring, A24A / M24A / S24A / A4RA / B4RA / M4TA / MDLA / BMXA / SP7A / MP7A / S4XA Holds Caged Needle Bearing To Mainshaft	1
90881B.....	Snap Ring, S24A / A24A / A4RA / MDLA / M4TA / B4RA / M24A / BMXA / SP7A / MP7A / S4XA (Mainshaft) Round Wire (.040" Diameter) 1 1/16"OD	1
90883A.....	Snap Ring, S24A / A24A / A4RA / M4TA / B4RA / M24A / BMXA / MDLA Holds Mainshaft Bearing To Case (Use 60884CA)	1
60883C.....	Snap Ring, S24A / A24A / M4TA / MDLA / SP7A / MP7A / S4XA 2nd Shaft Ball Bearing To Case ..	1
60884C.....	Snap Ring, S24A / A24A / M4TA / B4RA / M24A / SP7A / MP7A / S4XA / BMXA Countershaft Bearing To Case With 2.670"OD To Case	1
60884CA.....	Snap Ring, S24A / A24A / A4RA / M4TA / B4RA / M24A / BMXA / MDLA Holds Mainshaft Bearing To Case.....	1
60887A.....	Split Washer, S24A / A24A / A4RA / M4TA / B4RA / M24A (Counter Shaft) (Horse Shoe) (2 Per Pack)	1
90889A.....	Snap Ring, S24A / A24A / M4TA / MDLA / SP7A / MP7A / S4XA 2nd Shaft Ball Bearing To Case (Use 60883C).....	1
90899BA.....	Snap Ring, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Differential Bearing To Case .106"	1
90899BB.....	Snap Ring, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Differential Bearing To Case .108"	1
90899BC.....	Snap Ring, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Differential Bearing To Case .110"	1
90899BD.....	Snap Ring, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Differential Bearing To Case .112"	1
90899BE.....	Snap Ring, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / SP7A / MP7A / S4XA Differential Bearing To Case .114"	1
90900B.....	Servo Assembly, S24A / A24A / M24A (Cast # P24Y) With Secondary Valve Body.....	1
90900B-2.....	Detent Housing, S24A / A24A / M24A Servo (Aluminum) 3 Bolt	1
90900D.....	Servo Assembly, A4RA (Cast # P4R2) With Secondary Valve Body (Uses A 2 Bolt Shift Fork Detent On Top) (Can Use 90900E)	1
90900D-2.....	Detent Housing, A4RA / M4TA Servo (Aluminum) 2 Bolt	1
90900E.....	Servo Assembly, M4TA (Cast # P4R-1) With Secondary Valve Body (Uses A 2 Bolt Shift Fork Detent On Top) (Can Use 90900D).....	1
90900F.....	Servo Assembly, B4RA (Cast # P4R4) With Secondary Valve Body (Uses A Built In To Housing Shift Fork Detent).....	1

PART #	HARD PARTS (Continued)	QTY.	REFERENCE #
90900H	Servo Assembly, SP7A / MP7A / S4XA (Cast # P56) With Secondary Valve Body	1	
90900M	Servo Assembly, BMXA (CAst # P497)	1	
90900J	Servo Assembly, MDLA (Cast # PDM)	1	
90924B	Regulator, S24A / A24A / M24A / SP7A / MP7A / S4XA (2 Valves In Top Section Are Held In By Roll Pins) Some Have No Cast Number, Some Have P4P Casting	1	
90924D	Regulator, A4RA / M4TA / B4RA / MDLA / BMXA (Cast # P4R) 1 Valve In Top Section Is Held In By A Roll Pin (1 Has A Spring Clip)	1	
90940B	Accumulator Assembly, S24A / A24A / M24A / SP7A / MP7A / S4XA Low/Hold (In Rear Cover)	1	
90960B	Piston, S24A / A24A / M24A 1st/3rd/4th Clutch (4.315"OD) 1.589"ID	1-3	
70960C	Piston, SP7A / MP7A / S4XA 2nd Clutch (4.552"OD) (.318" Thick At Edge)	1	
90960B	Piston, A24A / M24A / S24A 2nd Clutch (1.700"ID) (Also Fits A4RA / B4RA 1st/3rd & 4th Clutch) (Also Fits BMXA 1st/3rd & 4th Clutch)	1-3	
90960D	Piston, A4RA / B4RA / BMXA 1st/2nd/3rd/4th Clutch (4.315"OD) 1.666"ID (.320" Thick) (Also Fits S24A / A24A / M24A 2nd Clutch)	1-4	
90960E	Piston, M4TA / MDLA / SP7A / MP7A / S4XA 1st/3rd/4th Clutch (4.555"OD) 1.585"ID	1-3	
90960EA	Piston, M4TA 2nd Clutch (4.555"OD) 1.705"ID	1	
90960M	Piston, BMXA 2nd Clutch (4.315"OD) 1.665"ID (.355" Thick)	1	
90964B	Piston, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA Low/Hold Clutch (Secondary Shaft) 3.920"OD (1.340"ID) (.685" Through Center)	1	
90970B	Spring, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA 1st/2nd/3rd/4th Clutch (2.450"OD) .238"OD Of Wire (Also Fits BMXA 1st/3rd/4th Clutch)	1-4	
90970BA	Spring, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA 1st/2nd/3rd/4th Clutch (2.490"OD) .250"OD Of Wire (Also Fits SP7A / MP7A / S4XA 1st/3rd/4th Clutch)	1-4	
90970BB	Spring, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA 1st/2nd/3rd/4th Clutch (2.465"OD) .268"OD Of Wire (Gold Colored Square Wire)	1-4	
90970H	Spring, SP7A / MP7A / S4XA 2nd/4th Clutch (Use 60972C)	1-2	
60972C	Spring, SP7A / MP7A / S4XA 2nd/4th Clutch	1-2	
90974B	Spring, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA Low/Hold Clutch Return (Secondary Shaft) 2.125"OD (1.380" Tall) .205"OD Of Wire	1	
90980B	Retainer, S24A / A24A / M4TA / M24A / MDLA / MPYA / M5DA / SP7A / MP7A / S4XA 1st/3rd/4th Clutch (2.450"OD) (1.600"ID)	1-3	
90980BA	Retainer, A4RA / B4RA 1st/2nd/4th Clutch (2.445"OD) 1.680"ID (Also Fits S24A / A24A / M24A 2nd Clutch) (Also Fits BMXA 1st/2nd/3rd/4th Clutch)	1-4	
90980E	Retainer, M4TA 2nd Clutch (2.445"OD) 1.715"ID (Also Fits SP7A / MP7A / S4XA 2nd Clutch)	1	
90980N	Retainer/Piston, BZKA/MCVA/MRVA/MZKA 1st/2nd Clutch (Bonded) Spring 2002-07	1	
90984B	Retainer, S24A / A24A / M4TA / M24A / MDLA / SP7A / MP7A / S4XA Low/Hold Clutch Spring (Secondary Shaft) 2.065"OD (1.355"ID) .195" Thick	1	
90991B	Shift Rod, S24A / A4RA / B4RA / SP7A / S4XA (12 5/16" Long) Welded On Rooster Comb	1	
90991C	Shift Rod, A24A / M24A / MP7A (12 5/16" Long) Rooster Comb Held On By A Pin	1	
90991E	Shift Rod, M4TA / MDLA / BMXA (13 1/4" Long) Welded On Rooster Comb	1	
90995B	Park Pawl Assembly, S24A / A24A / A4RA / M4TA / B4RA / M24A / MDLA / BMXA / MP7A / SP7A / S4XA	1	
80996	Fitting, S24A / A24A / M24A / MDLA / M4TA / MP7A / SP7A / S4XA / BMXA Cooler Line (1 1/2" Long) Holds Cooler Line To Bell	1-2	
80996A	Fitting, S24A / A24A / M24A / MDLA / M4TA / MP7A / SP7A / S4XA / BMXA Cooler Line (4 5/8" Long) Holds Cooler Line To Bell	1	
90999B	Tube Set, S24A / A24A / M24A (6 Tubes)	1	
90999D	Tube Set, A4RA / B4RA (8 Tubes)	1	
90999E	Tube Set, M4TA (10 Tubes)	1	
90999H	Tube Set, SP7A / MP7A / S4XA (6 Tubes)	1	
90999J	Tube Set, MDLA (6 Tubes)	1	
90999M	Tube Set, BMXA (8 Tubes)	1	

**Technical Bulletin # 1150**Transmission: *Honda/Acura*Subject: *Filling and Checking the Oil Levels*Application: *Honda/Acura*Issue Date: *January, 2008*

Honda/Acura

Filling and Checking the Oil Levels

Please use the following procedures to check the oil level on all front wheel drive Honda and Acura vehicles. DO NOT use these procedures on Isuzu built vehicles with rear wheel drive (4L30E).

Start engine and warm up to operation temperature. Turn off engine and wait 1-1 ½ minutes. Remove dipstick. Wipe oil off. Insert dipstick and pull out to read level at bottom of dipstick. Oil should read between marks or within range shown on dipstick.

Honda and Acura vehicles specified oil is ATF-ZI (part No. 08200-9001) for current and past vehicles including CVT.

